



IM R 65 DA

65 FT
working height

NEW

STANDARD EQUIPMENT


- Automatic outriggers levelling with electronic inclinometer
- Outrigger pads
- Emergency hand pump
- Cylinder holding valve
- Electronic hour meter
- Momentum device
- Load cell
- Hydraulic Jib
- Rubber tracks
- Hydraulically adjustable tracks width
- Double speed traction
- electro-pump for indoor use
- Air / Water outlet in the platform
- outlet in the platform
- Honda GX390 petrol engine -
- Kubota Z602 diesel engine -
- Wireless radio-control box
- Upper control box cover

OPTIONALS

- 12V emergency electro-pump
- Non-marking rubber tracks
- Oversized outrigger pads
- Working light in the platform
- Aluminium basket
- Winch kit
- IMERVIEW kit

BENEFITS

- ✓ New removable control box with bigger display and easier operator interaction for better machine control.
- ✓ RETURN TO HOME function to facilitate basic work operations.
- ✓ New manual lever activation function to facilitate the upper emergency maneuvers.
- ✓ Double articulation boom with active jib for a high operability in all construction site conditions.
- ✓ Hydraulically adjustable tracks width: more stability and traction to move around the building site or rough terrain.
- ✓ Proportional and simultaneous electro-hydraulic controls: efficiency and safety for operators.
- ✓ Automatic outriggers levelling: maximum easiness of use and safety.
- ✓ Permanent weight control device for improved safety and performance.
- ✓ Slewing 360° (not continuous): outstanding aerial accessibility in any work situation.
- ✓ Basket rotation $\pm 62^\circ$: complete placement on working site in any condition.
- ✓ Compact size, with limited overall outrigger footprint.
- ✓ Engine guarded for safety and working protection.
- ✓ Aluminium basket

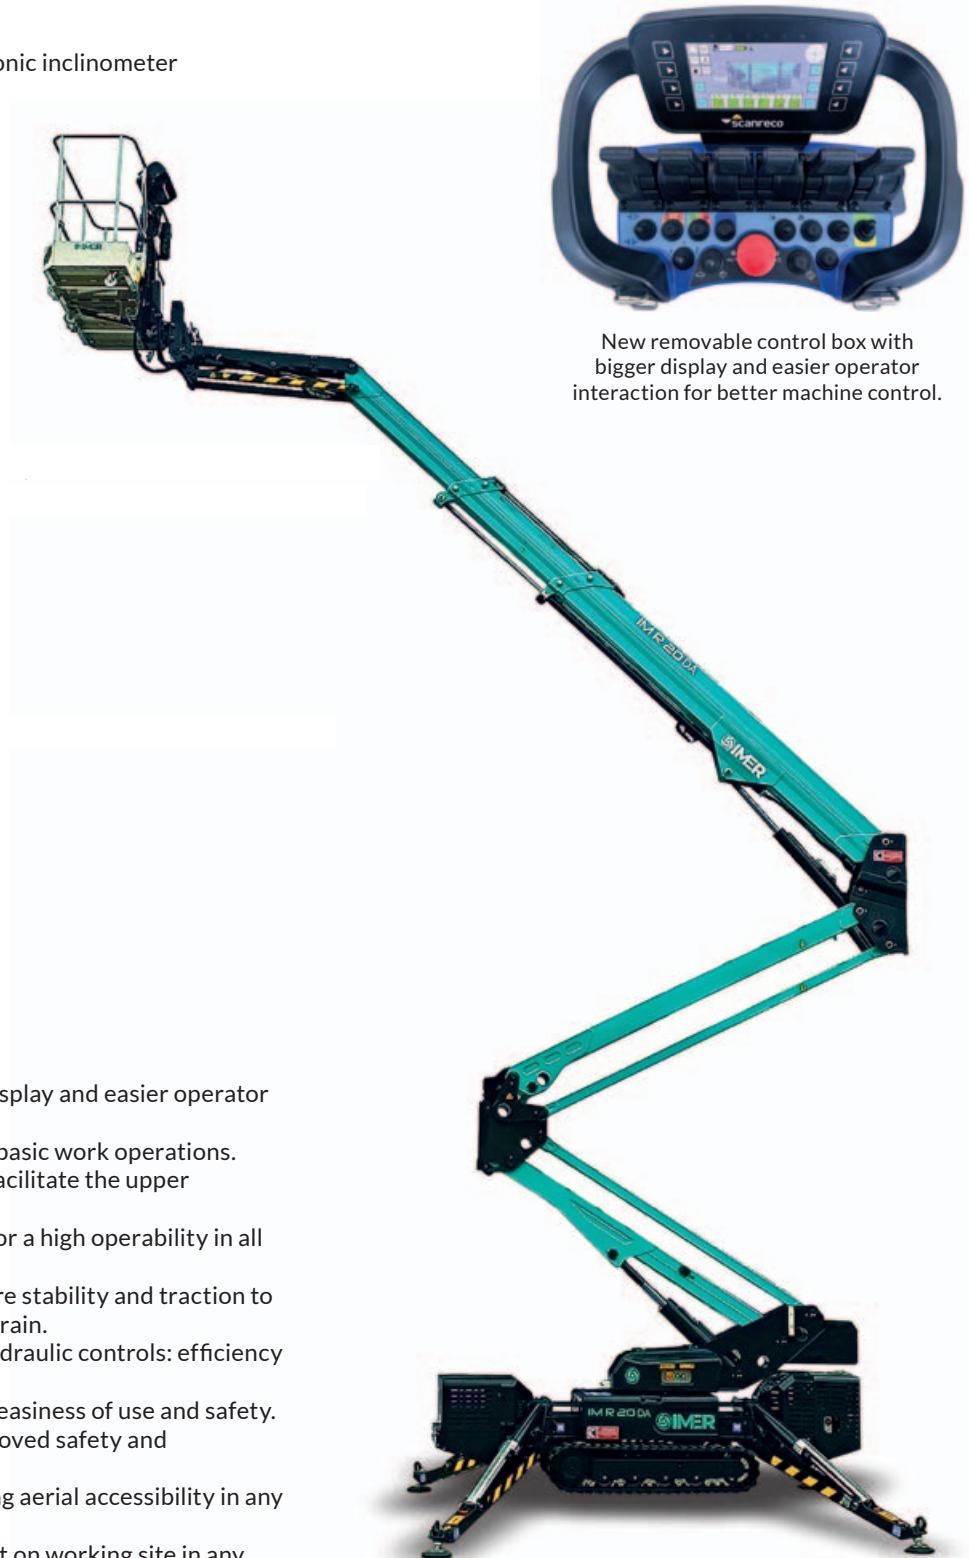



New removable control box with bigger display and easier operator interaction for better machine control.



Wellbuilt Equipment Inc.
25210 South State Street
Crete, IL 60417

Local :708-279-7574
Toll Free: 800-833-3748







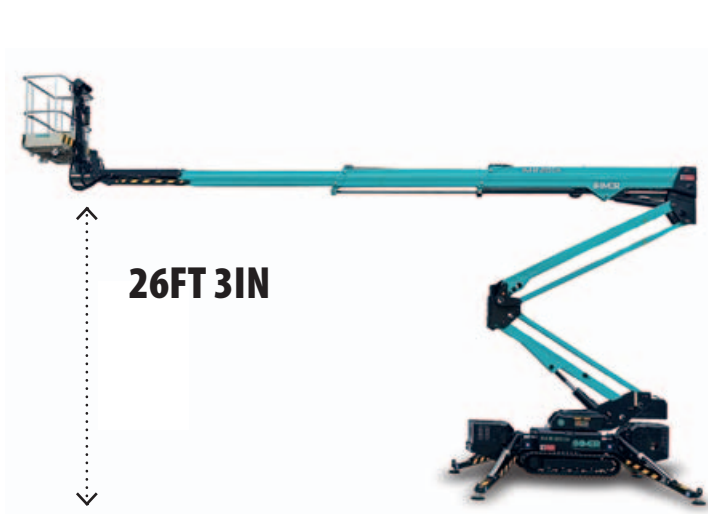

Compact jib group with load cell and basket rotation system.



Strong protective engine structure for an increased impact protection, with easy opening system.

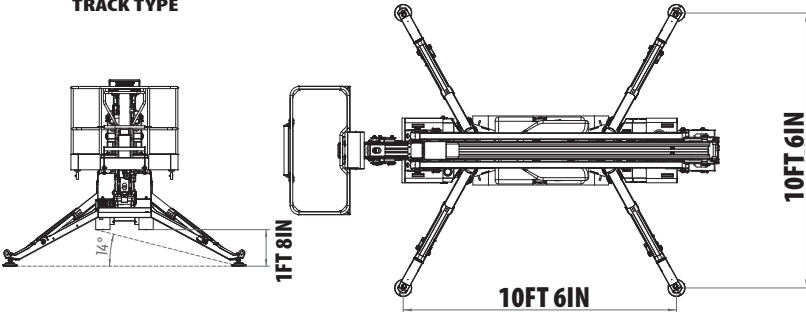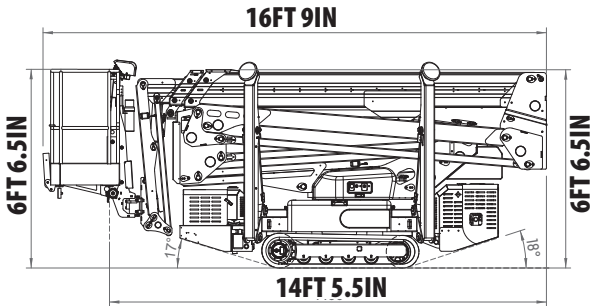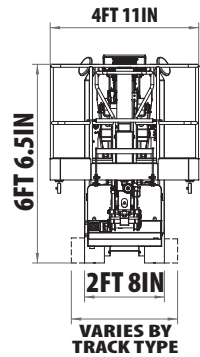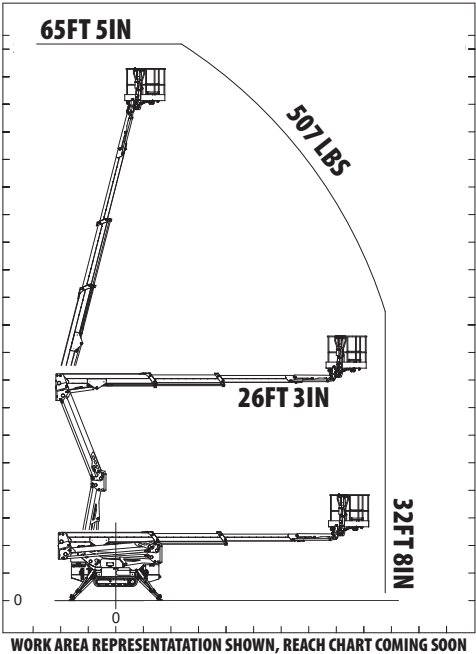

Working height	65FT 5IN
Platform height	59FT
Side outreach	32FT 8IN
Up & Over	26FT 3IN
Turret slewing	360 NON CONTINUOUS
Basket dimensions	4FT 11IN x 2FT 4IN x 3FT 7IN
Overall outrigger footprint	10FT 6IN
Driving speed	1.25MPH
Gradeability	30 %
Max load capacity	507 LBS
Electric motor	3HP
Petrol engine Honda GX390	11HP
Diesel engine Kubota Z602	8.7HP
Transport length (without basket)	14FT 9.5IN
Transport width	2FT 8IN
Stowed height (with outrigger pads)	6FT 6.5IN
Total weight of the machine	6173LBS GAS 6305LBS DIESEL



Compact dimensions for maximum accessibility into any work environment.



Wellbuilt Equipment Inc.
25210 South State Street
Crete, IL 60417

Local :708-279-7574
Toll Free: 800-833-3748

